

EDGE8™ Solutions



EDGE8™ Solutions Introduction


Corning® ClearCurve® bend-optimized multimode and Corning® SMF-28® single-mode optical fibers are the core element of the system ensuring reliability when designing custom-engineered components thanks to its significant reduction in macrobend loss even in the most challenging bend scenarios. This technology enables Corning to provide significantly greater density across the range combined with a simple design and integration for LAN and SAN areas within the data center, while the preterminated components reduce installation times and enable faster moves, adds, and changes (MACs).

Our EDGE™ solutions were the industry's first preterminated optical cabling systems specifically designed for the data center environment, and the value that EDGE provides to the industry continues to be proven. Density, network uptime, speed, simplicity, and a clear migration path to meet future requirements ... EDGE addresses it all. However, switch and transceiver technology roadmaps clearly indicate that transmission speeds ranging from 1G to 400G will be based on either 2-fiber (Base-2) or 8-fiber (Base-8) connectivity solutions.

That's the motivation behind EDGE8 solutions. All of the value of our original EDGE solutions, with the added superior network scalability, improved link performance, and 100 percent fiber utilization of a Base-8 design.

EDGE8™ solutions strengthen your data center in three key areas:

- increased asset utilization with reduced patch cord complexity and the elimination of stranded cabling assets
- technology adoption due to 100 percent fiber utilization — without the need for conversion modules — improving the link performance while reducing costs
- risk avoidance, providing a simple and clear path to 40G, 100G, and 400G

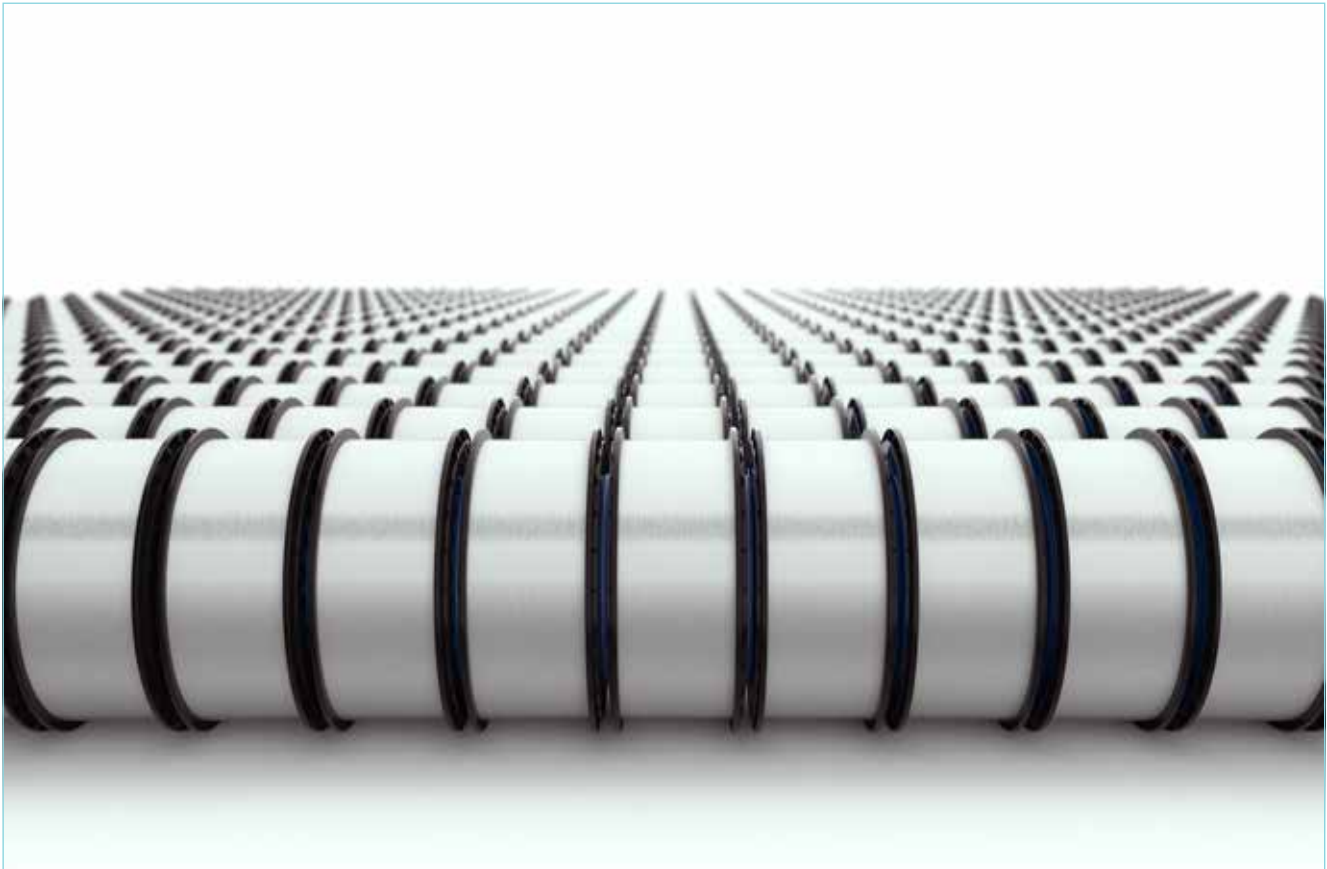



Contents

EDGE8™ Housings	
High-Density Housings and Fixed Housings	4
EDGE8 Trunks	
MTP® Trunks, MTP Extender Trunks, MTP Hybrid Trunks, and MTP Hybrid Extender Trunks	8
EDGE8 MTP Patch Cords	
For Direct-Connect, Interconnect, and Cross-Connect Applications	16
EDGE8 Harnesses	
Direct-Connect, Trunk, and Module Harnesses	17
EDGE8 Modules	
Universal, Port Breakout Module, Front Access Breakout Module, and Plug & Play™ Base-8 Module	20
EDGE8 Adapter Panels	
Pass-Through Patch Panel with MTP Adapters	26
EDGE8 TAP Modules	
Port Monitoring in LAN and SAN DC Areas	27
EDGE8 Tap Harnesses	
Port Monitoring in LAN and SAN DC Areas	32
Reverse Polarity Patch Cords and Colored Clips	
Uniboot Design with the Possibility of Optional Color Coding	34
Accessories	
Cleaning, Housing, Trunk, and MDA/Cross-Connect	36

EDGE8™ HD Housings

EDGE8™ HD housings mount in 19-in racks or cabinets and provide industry-leading ultra-high-density connectivity when combined with EDGE8 modules, panels, harnesses, trunks, and patch cords.

The unique design of EDGE8 HD housings include sliding drawers enabling module or panel installation from the front or rear of the housing. Each sliding drawer contains integrated cable routing elements to make real structured patch cord management possible while providing unprecedented finger access without the need for tools or any other accessories. All EDGE8 HD housings come with additional side-routing guides for patch cord integration to the cabinet. The adjustable mounting brackets provide flexible installation options for back-to-back or flush-mounting requirements, and the quick-mount feature makes it quick and easy for one person to install the housing with little effort.

The mounting and removal of trunks is a simple, quick, and tool-less operation enabling rapid deployment of high-fiber-count trunks for faster moves, adds, and changes (MACs).

Labeling the housing couldn't be easier with a full-size mounting area on the inside of the front door for the display of clear and concise information. The easily installable trunk mounting plate provides flexibility depending on your design (e.g. back-to-back) or application (e.g. reduced depth) concept.



EDGE8 High-Density Housing
| Photo REN474

EDGE8™ Solutions

CORNING

Features and Benefits

6-slot sliding drawers

Allow unprecedented finger access, easier patch cord/harness routing, and port identification

Quick mounting system

Enables one-person installation and depth adjustment of the housing in the rack

Integrated strain-relief plate can rotate 90 degrees

Makes it possible to install trunks through side or rear cable entry points

Removable top covers on the 1U and 2U housings

Provides easier access to modules and panels

Total flexibility in the same HD housing

- Accepts EDGE8™ modules
- Accepts EDGE8 port breakout modules
- Accepts EDGE8 1x, 2x, and 4x MTP® adapter panels
- Accepts EDGE8 port tap modules

High-port concentration with LC duplex and MTP Base-8 system

- 1U EDGE8 Housing EDGE8-01U
 - 48x LC duplex ports (96 fiber)
 - 48x MTP ports (384 fiber)
- 1U EDGE8 Housing EDGE8-01U-SP
 - 72x LC duplex ports (144 fiber)
 - 72x MTP ports (576 fiber)
- 2U EDGE8 Housing EDGE8-02U
 - 144x LC duplex ports (288 fiber)
 - 144x MTP ports (1152 fiber)
- 4U EDGE8 Housing EDGE8-04U
 - 288x LC duplex ports (576 fiber)
 - 288x MTP ports (2304 fiber)



EDGE8-01U
| Photo REN457



EDGE8-01U-SP
| Photo REN446



EDGE8-02U
| Photo REN463



EDGE8-04U
| Photo REN466

Ordering Information

Part Number	Height	Dimensions (W x D x H)	Packaging Dimensions (W x D x H)	Shipping Weight	Number of Panels per Housing
EDGE8-01U	1U	432 mm x 561 mm x 44 mm	584 mm x 673 mm x 191 mm	6.8 kg (15 lb)	12
EDGE8-01U-SP	1U	432 mm x 561 mm x 44 mm	581 mm x 667 mm x 197 mm	8.2 kg (18 lb)	18
EDGE8-02U	2U	432 mm x 561 mm x 88 mm	578 mm x 667 mm x 241 mm	10.4 kg (23 lb)	36
EDGE8-04U	4U	432 mm x 561 mm x 177 mm	578 mm x 667 mm x 327 mm	16.5 kg (36 lb)	72

Notes: 1) When rear strain-relief plate is removed from part number EDGE8-01U-SP, product depth reduces to 14.9 in.
2) EDGE-01U has sliding inner assembly. EDGE-01U-SP does not have sliding inner assembly.

EDGE8™ FX Housings

EDGE8™ FX housings mount in 19-in racks or cabinets and provide industry-leading high-density connectivity when combined with EDGE8 modules, panels, harnesses, trunks, and patch cables.

EDGE8 FX housings include a fixed, compact design providing module or panel deployment from the front or rear of the housing. The integrated cable routing elements of the housing make real structured patch cable management possible while providing unprecedented finger access without the need for tools or any other accessories.

All EDGE8 FX housings come with integrated side routing guides for patch cable integration to the cabinet. The adjustable mounting brackets provide flexible installation options for back-to-back or flush-mounting requirements. The new quick-mount feature makes it quick and easy for one person to install the housing with little effort.

The mounting and removal of trunks is a simple, quick, and tool-less operation enabling rapid deployment of high-fibre-count trunks for faster moves, adds, and changes (MACs).

Labeling the housing couldn't be simpler – there is a full-size mounting area on the inside of the front door for clear and concise information to be displayed. The easily installable trunk mounting plate provides flexibility depending on your design (e.g., back-to-back) or application (e.g., reduced depth) concept.



EDGE8-04U-FP Housing
| Photo REN1579

EDGE8™ Solutions



EDGE8™ FX Housing

EDGE8™ FX housings are available in 1U, 2U, and 4U sizes that mount in 19-in racks or cabinets as well as two other housings that can mount in the floor. Combine these housings with the EDGE modules, panels, trunks, harnesses, and jumpers to experience an industry-leading solution. The reduced depth of the rack-mount housings allow for the back-to-back installation in 4-post racks or cabinets as well as third-party floor boxes.



EDGE8-01U-EMOD
| Photo REN1454



EDGE8-01U-FP
| Photo REN1140



EDGE8-02U-FP
| Photo REN1616



EDGE8-04U-FP
| Photo REN1579



EDGE8-SMH
| Photo REN1973




EDGE8-FZB-04U
| Photo REN1545

Part Number	Height Unit	Dimensions (W x D x H)	Packaging Dimensions (W x D x H)	Shipping Weight	Number of Panels per Housing
EDGE8-01U-EMOD	1U	432 mm x 107 mm x 44.5 mm (17 in x 4.2 in x 1.75 in)	534 mm x 201 mm x 138 mm (21 in x 7.9 in x 5.4 in)	1.14 kg (2.5 lb)	12
EDGE8-01U-FP	1U	488 mm x 439 mm x 43 mm (19.2 in x 17.3 in x 1.7 in)	584 mm x 470 mm x 152 mm (22.9 in x 18.5 in x 5.9 in)	4.4 kg (9.6 lb)	12
EDGE8-02U-FP	2U	432 mm x 434 mm x 89 mm (17 in x 17.1 in x 3.5 in)	569 mm x 346 mm x 229 mm (22.4 in x 13.6 in x 9 in)	6.4 kg (14 lb)	24
EDGE8-04U-FP	4U	432 mm x 434 mm x 178 mm (17 in x 17.1 in x 7 in)	567 mm x 346 mm x 320 mm (22.4 in x 13.6 in x 7.25 in)	9.6 kg (21 lb)	48
EDGE8-FZB-04U	-	527 mm x 527 mm x 241 mm (20.75 in x 20.75 in x 9.5 in)	656 mm x 643 mm x 356 mm (25.8 in x 25.3 in x 14 in)	17.8 kg (39 lb)	48
EDGE8-SMH	-	152 mm x 102 mm x 25 mm (6 in x 4 in x 1 in)	229 mm x 184 mm x 57 mm (9 in x 7.25 in x 2.25 in)	1 kg (3 lb)	1

When rear strain-relief plate is removed, the depth reduces to 8.5-in for products EDGE-01U-FP/EDGE-02U-FP/EDGE-04U-FP. See hardware accessories for alternate strain-relief options.

EDGE8™ Trunks

EDGE8™ MTP® trunks are preterminated cables with ultra-low-loss 8-fiber MTP connectors on both ends. The trunks build up the major backbone of the passive network infrastructure, and enable rapid deployment for your campus LAN or data center facility. All trunks are shipped with strain-relief clips that allow for tool-less installation in both EDGE8 solutions and Plug & Play™ systems housings. These trunks conform to TIA-568 Type-B polarity.

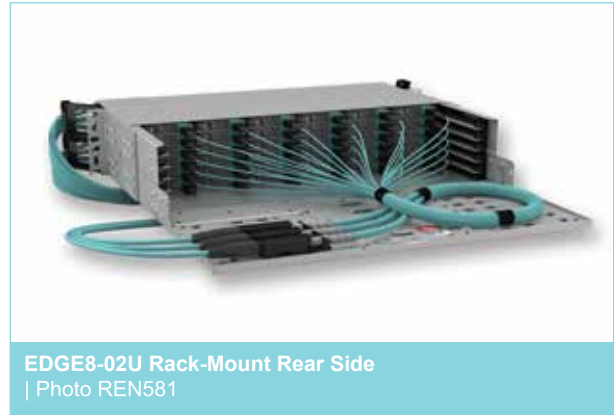

Trunk Specifications

Mechanical Characteristics					
Fiber	Nominal Outer	Pulling Grip Outer	Weight	Min. Bend Radius	Min. Bend Radius
Non-Armored Cable Specifications					
8	5.0 mm (± 0.3 mm)	38 mm (1.5 in)	23.5 kg/km (15.8 lb/1000)	75 mm (2.95 in)	25 mm (0.98 in)
16	7.0 mm (± 0.3 mm)	38 mm (1.5 in)	41.1 kg/km (27.6 lb/1000)	105 mm (4.13 in)	35 mm (1.38 in)
24	7.0 mm (± 0.3 mm)	38 mm (1.5 in)	42.1 kg/km (28.3 lb/1000)	105 mm (4.13 in)	35 mm (1.38 in)
32	8.1 mm (± 0.3 mm)	51 mm (2.0 in)	56.1 kg/km (37.7 lb/1000)	121.5 mm (4.78 in)	40.5 mm (1.59 in)
48	8.1 mm (± 0.3 mm)	51 mm (2.0 in)	57.6 kg/km (38.7 lb/1000)	121.5 mm (4.78 in)	40.5 mm (1.59 in)
72	10.2 mm (± 0.3 mm)	51 mm (2.0 in)	86.1 kg/km (57.9 lb/1000)	153 mm (6.02 in)	51 mm (2.01 in)
96	10.2 mm (± 0.3 mm)	51 mm (2.0 in)	88.4 kg/km (59.4 lb/1000)	153 mm (6.02 in)	51 mm (2.01 in)
144	12.5 mm (± 0.3 mm)	51 mm (2.0 in)	139.4 kg/km (93.7 lb/1000)	187.5 mm (7.38 in)	62.5 mm (2.46 in)
192	16.0 mm (± 0.3 mm)	51 mm (2.0 in)	232.6 kg/km (156.3 lb/1000)	240.0 mm (9.45 in)	80.0 mm (3.15 in)
288	22.9 mm (± 0.3 mm)	51 mm (2.0 in)	393.0 kg/km (264.1 lb/1000)	343.5 mm (13.52 in)	114.5 mm (4.51 in)

Note: Plug size information: Fiber count 12-24 = Size 1 (h = 15 mm); Fiber count 36-144 = Size 2 (h = 20 mm).

Trunk Specifications

Mechanical Characteristics					
Fiber	Nominal Outer	Pulling Grip Outer	Weight	Min. Bend Radius	Min. Bend Radius
Armored Cable Specifications					
8	11.3 mm (± 0.3 mm)	51 mm (2.0 in)	102.6 kg/km (68.9 lb/1000)	169.5 mm (6.67 in)	56.5 mm (2.22 in)
16	12.6 mm (± 0.3 mm)	51 mm (2.0 in)	130.9 kg/km (88.0 lb/1000)	189 mm (7.44 in)	63 mm (2.48 in)
24	12.6 mm (± 0.3 mm)	38 mm (1.5 in)	131.6 kg/km (88.4 lb/1000)	189 mm (7.44 in)	63 mm (2.48 in)
32	13.7 mm (± 0.3 mm)	51 mm (2.0 in)	154.4 kg/km (103.7 lb/1000)	205.5 mm (8.09 in)	68.5 mm (2.7 in)
48	13.7 mm (± 0.3 mm)	51 mm (2.0 in)	155.9 kg/km (104.7 lb/1000)	205.5 mm (8.09 in)	68.5 mm (2.7 in)
72	16.6 mm (± 0.3 mm)	51 mm (2.0 in)	207.7 kg/km (139.6 lb/1000)	249 mm (9.8 in)	83.0 mm (3.27 in)
96	16.6 mm (± 0.3 mm)	51 mm (2.0 in)	210.0 kg/km (141.1 lb/1000)	249 mm (9.8 in)	83 mm (3.27 in)
144	18.8 mm (± 0.3 mm)	51 mm (2.0 in)	278.6 kg/km (187.2 lb/1000)	282.0 mm (11.1 in)	94.0 mm (3.7 in)
192	23.7 mm (± 0.3 mm)	76 mm (3.0 in)	421.4 kg/km (283.1 lb/1000)	355.5 mm (14.0 in)	118.5 mm (4.67 in)
288	31.3 mm (± 0.3 mm)	76 mm (3.0 in)	646.6 kg/km (434.5 lb/1000)	469.5 mm (18.48 in)	156.5 mm (6.16 in)

Note: Plug size information: Fiber count 12-24 = Size 1 (h = 15 mm); Fiber count 36-144 = Size 2 (h = 20 mm).

Optical Performance Multimode

	Connector Polish	End Face	Reflectance	Max. Insertion Loss	Operation
MTP® Trunks	PC	Flat	≤ -20 dB	≤ 0.25 dB*	-10 °C to 60 °C

Optical Performance Single-Mode

	Connector Polish	End Face	Reflectance	Max. Insertion Loss	Operation
MTP Trunks	APC	Angled	≤ -65 dB	≤ 0.35 dB*	-10 °C to 60 °C

*Note: IL in preconnectorized products is measured in the factory through two mated pairs.



Trunk Shipping Information

Reel Capacities - Non-Armored Cable Specifications								
Packaging Method	Box E	Box H	Reel 1	Reel 2	Reel 3	Disposable Reel	Reel Q	Reel W
Packaging Material	Coiled cable	Coiled cable	Plastic reel	Plastic reel	Plastic reel	Plastic reel	Plywood reel	Plywood reel
Reel Diameter (in)			19.5	19.5	19.5	32	27	36
Reel Width (in)			5	10	16	19	36	32
Box Dimensions (in)	21x21x3.3	31x31.5x7	26x25.5x7	26x25.5x7	26x25.5x7			
Fiber Count	Maximum (ft)							
8	75	-	1200	2255	3500	-	7600	9289
16	75	-	600	1100	1800	-	3878	4739
24	75	-	600	1100	1800	-	3878	4739
32	75	-	550	1050	1700	-	2896	3539
48	75	-	550	1050	1700	-	2896	3539
72	75	-	300	600	999	-	1826	2232
96	75	-	300	600	999	-	1826	2232
144	75	-	200	400	700	-	1216	1486
192	-	66	-	-	-	850	1262	2100
288	-	66	-	-	-	460	616	1000

Note: Trunks under 75 ft are packaged in a cardboard box and not on a reel.



Reel Capacities - Armored Cable Specifications								
Packaging Method	Box E	Box H	Reel 1	Reel 2	Reel 3	Disposable Reel	Reel Q	Reel W
Packaging Material	Coiled cable	Coiled cable	Plastic reel	Plastic reel	Plastic reel	Plastic reel	Plywood reel	Plywood reel
Reel Diameter (in)			19.5	19.5	19.5	32	27	36
Reel Width (in)			5	10	16	19	36	32
Box Dimensions (in)	21x21x3.3	31x31.5x7	26x25.5x7	26x25.5x7	26x25.5x7			
Fiber Count	Maximum (ft)							
8	-	50	-	-	-	2000	4700	-
16	-	50	-	-	-	1500	3800	-
24	-	50	-	-	-	1500	3800	-
32	-	50	-	-	-	1500	3200	-
48	-	50	-	-	-	1500	3200	-
72	-	50	-	-	-	1200	2200	-
96	-	50	-	-	-	1200	2200	-
144	-	50	-	-	-	650	1700	-
192	-	50	-	-	-	500	1000	-
288	-	50	-	-	-	265	600	-

Note: Trunks under 75 ft are packaged in a cardboard box and not on a reel.

EDGE8™ MTP® Trunks

EDGE8™ MTP® trunks utilize an 8-fiber push/pull optical connector that is pinned on both ends of the cable. These trunks are designed to interface with the EDGE8 universal modules or adapter panels for parallel optic applications. The trunks are shipped with strain-relief clips that allow for tool-less installation in EDGE8 housings. The grip can be pulled using up to 100 lbs of pulling tension while providing complete protection for the connectors.


Features

- Low-loss connectivity enables system design flexibility
- Enabled by bend-insensitive Corning multimode or single-mode fibers
- Features slim, round 8-fiber legs
- Tool-less installation with EDGE™ mounting clips



EDGE8 16-F MTP Trunk
| Photo REN2965

Ordering Information



*For custom labels, add the letter "L" as prefix to the part number e.g. LGE5E548QPNDUxxxFL
Print for custom labels can be up to 30 characters. Information to be printed on custom labels must be provided at the time of order.

1 Select grip.

G = Grip on first end only
D = Grip on both ends
Z = No grip

2 Select MTP connector

(end one on outside of reel).
E5 = MTP 8 F (pinned) MM
E7 = MTP 8 F (pinned) SM
00 = Pigtail (*Only available with P = straight-through polarity*)

3 Select MTP connector

(end two on inside of reel).
E5 = MTP 8 F (pinned) MM
E7 = MTP 8 F (pinned) SM

4 Select standard fiber count.

08 = 8 fiber 72 = 72 fiber
16 = 16 fiber 96 = 96 fiber
24 = 24 fiber E4 = 144 fiber
32 = 32 fiber K2 = 192 fiber
48 = 48 fiber U8 = 288 fiber

5 Select fiber type.

T = 50 μm multimode (OM3)
Q = 50 μm multimode (OM4)
V = 50 μm wideband multimode (OM5)
G = Single-mode Ultra (OS2)

6 Select cable type.

PN = Plenum, non-armored
AD = Plenum, BX armored

7 Select leg length

(end one on outside of reel).
D = 33 in (+3/-0 in)*
0 = Pigtail
Furcation legs are color-coded by fiber type.

8 Defines leg length

(end two on inside of reel).
D = 33 in (+3/-0 in)*
Furcation legs are color-coded by fiber type.

9 Select trunk type.

U = Standard Type-B
P = Straight-through Type-A

10 Select cable length.

005-999 ft
(1 ft increments measured from furcation to furcation)
002-300 m
(1 m increments measured from furcation to furcation)
Longer cable lengths available upon request.

11 Select unit of measure.

F = Feet
M = Meters

*For fiber counts above 144F, the legs will be staggered starting at 33-in.



EDGE8™ MTP® Extender Trunks

EDGE8™ MTP® extender trunks provide additional distance for the backbone of the EDGE8 solution. With a non-pinned MTP connector on one end of the cable, a pinned MTP connector on the other end, and a TIA-568 Type-A polarity, these trunks are designed to interface with an EDGE8 solutions universal module and an EDGE8 MTP trunk. All trunks are shipped with strain-relief clips that allow for the tool-less installation in EDGE8 solutions systems housings. MTP extender trunks are most often used in a zone distribution area (ZDA).


Features

- Low-loss connectivity enables system design flexibility
- Enabled by bend-insensitive Corning multimode or single-mode fibers
- Features slim, round 8-fiber legs
- Tool-less installation with EDGE™ mounting clips



EDGE8 16-F MTP Extender Trunk
| Photo REN2961

Ordering Information

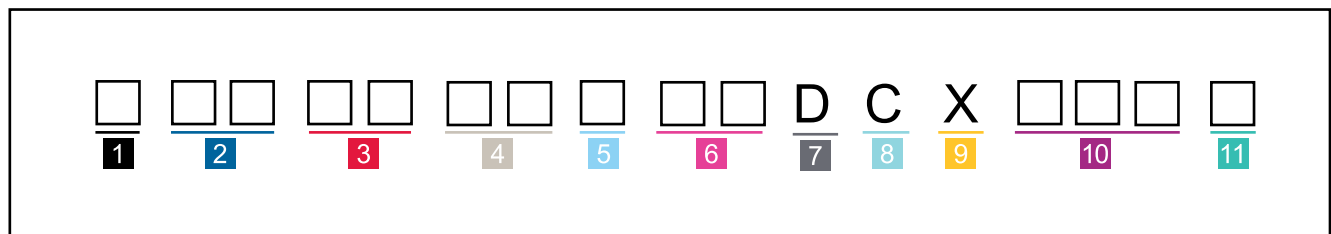

1 Select grip.

G = Grip on first end only
Z = No grip

2 Select MTP connector (end one on outside of reel).

E5 = MTP 8 F (pinned) MM
E7 = MTP 8 F (pinned) SM

3 Select MTP connector (end two on inside of reel).

E6 = MTP 8 F (non-pinned) MM
E8 = MTP 8 F (non-pinned) SM

4 Select standard fiber count.

08 = 8 fiber 72 = 72 fiber
16 = 16 fiber 96 = 96 fiber
24 = 24 fiber E4 = 144 fiber
32 = 32 fiber K2 = 192 fiber
48 = 48 fiber U8 = 288 fiber

5 Select fiber type.

T = 50 μm multimode (OM3)
Q = 50 μm multimode (OM4)
V = 50 μm wideband multimode (OM5)
G = Single-mode Ultra (OS2)

6 Select cable type.

PN = Plenum, non-armored
AD = Plenum, BX armored

7 Defines leg length (end one on outside of reel).

D = 33 in (+3/-0 in)
Mates with module/harness.

8 Defines leg length (end two on inside of reel).

C = 60 in (+3/-0 in)
Mates with trunk (long leg reaches from rear to the front side of housing).

9 Defines trunk type.

X = Extender

10 Select cable length.

005-999 ft
(1 ft increments measured from furcation to furcation)
002-300 m
(1 m increments measured from furcation to furcation)
Longer cable lengths available upon request.

11 Select unit of measure.

F = Feet
M = Meters




Hybrid MTP® to LC Duplex Uniboot Trunks

EDGE8™ Hybrid MTP® to LC duplex uniboot trunks combine pinned MTP connectors that connect to EDGE8 modules and duplex uniboot LC connectors that connect directly to the electronics, enabling more options for the cabling of data centers.



EDGE8 Hybrid MTP to LC Duplex Uniboot Trunk
| Photo REN3259

Ordering Information

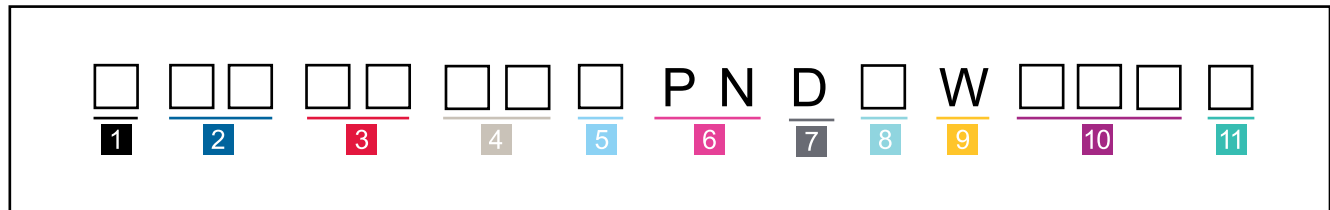

1 Select grip.

G = Grip on one end
Z = No grips

2 Select MTP connector (end one on outside of reel).

E5 = MTP 8 F (pinned) MM
E7 = MTP 8 F (pinned) SM

3 Select LC connector (end two on inside of reel).

79 = LC uniboot, low-loss MM
78 = LC uniboot SM

4 Select fiber count.

08 = 8 fiber 48 = 48 fiber
16 = 16 fiber 72 = 72 fiber
24 = 24 fiber 96 = 96 fiber
32 = 32 fiber E4 = 144 fiber

5 Select fiber type.

T = 50 μm multimode (OM3)
Q = 50 μm multimode (OM4)
V = 50 μm wideband multimode (OM5)
G = Single-mode Ultra (OS2)

6 Defines cable type.

PN = Plenum, non-armored

7 Defines leg length (end one or outside of reel).

D = 33 in (+3/-0 in)
Mates with module/harness.

8 Select leg length (end two or inside of reel).

J = 12 in (+3/-0 in)
K = 24 in (+3/-0 in)
L = 36 in (+3/-0 in) (standard)
M = 48 in (+3/-0 in)
N = 60 in (+3/-0 in)
P = 72 in (+3/-0 in)

9 Defines trunk type.

W = Universal hybrid trunk

10 Select cable length.

005-999 ft
(1 ft increments measured from furcation to furcation)
002-300 m
(1 m increments measured from furcation to furcation)
Longer cable lengths available upon request.

11 Select unit of measure.

F = Feet
M = Meters


Hybrid MTP® to LC Duplex Uniboot Extender Trunks

EDGE8™ Hybrid MTP® to LC duplex uniboot trunks combine pinned MTP connectors that connect into MTP trunks and duplex uniboot LC connectors that connect directly into the electronics providing more options for the cabling of data centers. These hybrid extender trunks are most often used in a zone distribution area (ZDA).



EDGE8 Hybrid MTP to LC Duplex Uniboot Trunk
| Photo REN3258

Ordering Information

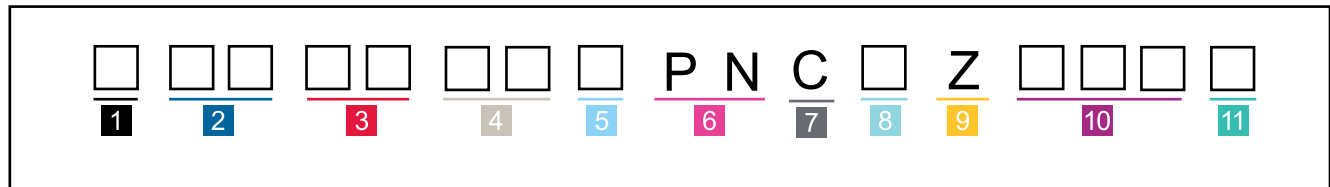

1 Select grip.

G = Grip on one end
Z = No grips

2 Select MTP connector (end one on outside of reel).

E6 = MTP 8 F (non-pinned) MM
E8 = MTP 8 F (non-pinned) SM

3 Select LC connector (end two on inside of reel).

79 = LC uniboot, low-loss MM
78 = LC uniboot SM

4 Select fiber count.

08 = 8 fiber 48 = 48 fiber
16 = 16 fiber 72 = 72 fiber
24 = 24 fiber 96 = 96 fiber
32 = 32 fiber E4 = 144 fiber

5 Select fiber type.

T = 50 μm multimode (OM3)
Q = 50 μm multimode (OM4)
V = 50 μm wideband multimode (OM5)
G = Single-mode Ultra (OS2)

6 Defines cable type.

PN = Plenum, non-armored

7 Defines leg length (end one on outside of reel).

C = 60 in (+3/-0 in)
Mates with module/harness.

8 Select 2.0 mm leg length (end two on inside of reel).

J = 12 in (+3/-0 in)
K = 24 in (+3/-0 in)
L = 36 in (+3/-0 in) (standard)
M = 48 in (+3/-0 in)
N = 60 in (+3/-0 in)
P = 72 in (+3/-0 in)

9 Defines trunk type.

Z = Universal hybrid extender

10 Select cable length.

005-999 ft
(1 ft increments measured from furcation to furcation)
002-300 m
(1 m increments measured from furcation to furcation)
Longer cable lengths available upon request.

11 Select unit of measure.

F = Feet
M = Meters




EDGE8 MTP® Patch Cords

EDGE8™ 8-fiber MTP® patch cords allow for seamless migration to higher data rates in the data center when used in conjunction with our EDGE8 pinned trunks.

EDGE8 MTP assembly has the same connector size and cable footprint as duplex LC jumpers used today. The density, airflow, and cable management advantages of EDGE8 solutions is preserved as you migrate to higher data rates. Assemblies are built utilizing MTP PRO connectors.

MTP PRO allows for a simple one-step, color-coded polarity change feature without removing the connector housing. The connector also provides the capability for field-friendly pinning configuration changes with safe handling of pins and easy color identification while maintaining product integrity.

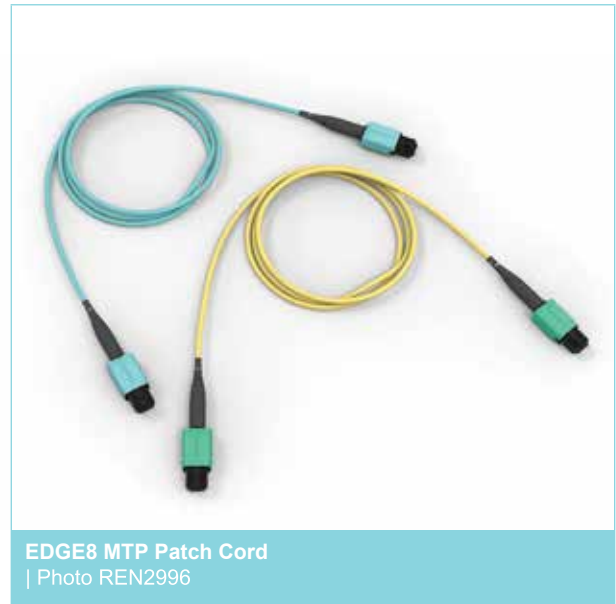

EDGE8 MTP Patch Cord
| Photo REN2996

Ordering Information

* J 0 8 E 8 - N

*For custom labels, add the letter "L" as prefix to the part number e.g. LJE6E608QE8-NBxxxF
Print for custom labels can be up to 30 characters. Information to be printed on custom labels must be provided at the time of order.

- | | | |
|--|--|--|
| <p>1 Select MTP PRO connector.</p> <ul style="list-style-type: none"> E5 = MTP 8 F (pinned) MM E6 = MTP 8 F (non-pinned) MM E7 = MTP 8 F (pinned) SM E8 = MTP 8 F (non-pinned) SM | <p>3 Select fiber type.</p> <ul style="list-style-type: none"> T = 50 µm multimode (OM3) Q = 50 µm multimode (OM4) V = 50 µm wideband multimode (OM5) G = Single-mode Ultra (OS2) | <p>6 Select patch cord polarity.</p> <ul style="list-style-type: none"> A = Type-A B = Type-B <p><i>Note: For patch cord polarity, reference AEN156.</i></p> |
| <p>2 Select MTP PRO connector.</p> <ul style="list-style-type: none"> E5 = MTP 8 F (pinned) MM E6 = MTP 8 F (non-pinned) MM E7 = MTP 8 F (pinned) SM E8 = MTP 8 F (non-pinned) SM | <p>4 Defines cable type.</p> <ul style="list-style-type: none"> E8 = Plenum, interconnect | <p>7 Select patch cord length.</p> <ul style="list-style-type: none"> 003-200 ft
<i>(Measured in 1 ft increments)</i> 001-060 m
<i>(Measured in 1 m increments)</i> |
| | <p>5 Defines patch cord.</p> <ul style="list-style-type: none"> N = Patch cord, no furcation | <p>8 Select unit of measure.</p> <ul style="list-style-type: none"> F = Feet M = Meters |

Note: Non-pinned patch cords should be used to mate to pinned EDGE8 trunks.

EDGE8™ Harnesses

One of the critical challenges facing data center owners, operators, and maintenance personnel in high-density (HD) computing areas is how to provide high-port-concentration deployments to support the latest generation of high-speed switches without losing them under a mass of patch cords.

An EDGE8™ harness is an ultra-slim 8-fiber (2.0 mm) preterminated fiber cable with an MTP® PRO connector on one end and four LC duplex connectors on the other. The majority of the harness is a single cable which breaks out into four, 2-fiber legs to enable connectivity to the switch ports which are staggered to replicate the specific switch ports to save on excess cable length. MTP PRO allows for a simple one-step, color-coded polarity change feature without removing the connector housing. The connector also provides the capability for field-friendly pinning configuration changes with safe handling of pins and easy color identification while maintaining product integrity.


Specially designed harnesses are available for numerous distribution switches including Cisco, Arista, Brocade, Juniper and HP using SFP+ (LC interfaces) for Ethernet or Fibre Channel with duplex transmission for port mirroring, aggregation, fabric, or breakout applications.

Features

- Slim, round 2-fiber interconnect cable
- Uniboot-style duplex connectors
- Low-loss connectivity enables system design flexibility
- Designed to withstand tight bends and challenging cable routes
- MTP PRO allows for pinning and polarity changes in the field



EDGE8 Staggered Harness
| Photo REN3017

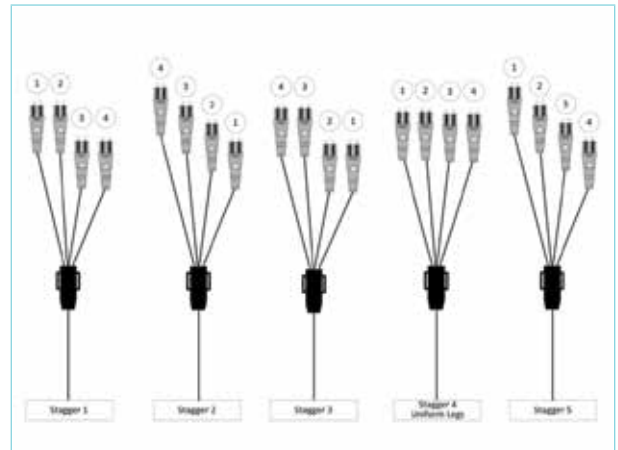

EDGE8 Staggered Harness Examples
| Photo ZA4253




EDGE8™ MTP to LC Uniboot Staggered Harnesses

The EDGE8™ MTP® to LC uniboot harness provides breakout from 8-fiber pinned MTP PRO connectors and LC duplex connectors.



EDGE8 Staggered Harness
| Photo REN3017

Ordering Information

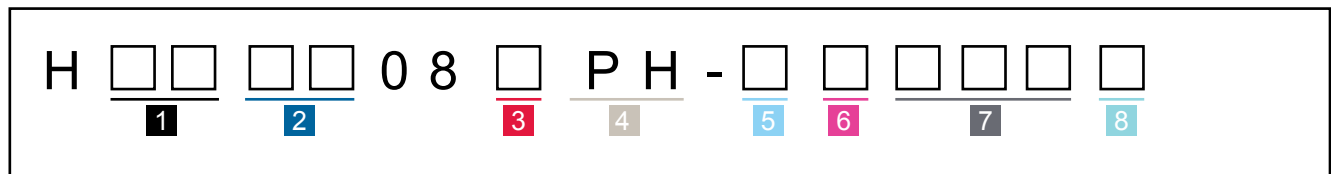

1 Select MTP PRO connector.
 E5 = MTP 8 F (pinned) MM
 E6 = MTP 8 F (non-pinned) MM
 E7 = MTP 8 F (pinned) SM
 E8 = MTP 8 F (non-pinned) SM

2 Select the breakout connector type.
 79 = LC uniboot, low-loss MM
 78 = LC uniboot SM
LCs are universally wired.

3 Select fiber type.
 T = 50 μm multimode (OM3)
 Q = 50 μm multimode (OM4)
 V = 50 μm wideband multimode (OM5)
 G = Single-mode Ultra (OS2)

4 Defines cable type.
 PH = Plenum, harness

5 Select leg length in inches (leg OD is 2.0 mm).
 1 = Type 1 Stagger
 2 = Type 2 Stagger
 3 = Type 3 Stagger
 4 = Type 4 Stagger (uniform)
 5 = Type 5 Stagger
Note: For harness stagger type, reference AEN157.

6 Select harness polarity.
 A = Type-A
 B = Type-B
Note: For harness polarity, reference AEN156.

7 Select harness length.
 003-020 ft
(1 ft increments measured from plug to MTP, does not include LC stagger)
 001-006 m
(1 m increments measured from plug to MTP, does not include LC stagger)

8 Select unit of measure.
 F = Feet
 M = Meters

An EDGE8 harness should have **type-A polarity** and a **non-pinned MTP PRO** connector when connecting to a **trunk**.

An EDGE8 harness should have **type-B polarity** and a **pinned MTP PRO** connector when connecting to a **module**.

EDGE8™ MTP to LC Uniboot Non-Staggered Harnesses

The EDGE8™ MTP® to LC uniboot harness provides breakout from 8-fiber pinned MTP PRO connectors and LC duplex connectors.



EDGE8 Non-staggered Harness
| Drawing REN3016

Ordering Information

H					08		PH	-					
	1	2		3		4			5	6	7	8	

- 1** Select MTP PRO connector.
 E5 = MTP 8 F (pinned) MM
 E6 = MTP 8 F (non-pinned) MM
 E7 = MTP 8 F (pinned) SM
 E8 = MTP 8 F (non-pinned) SM

- 2** Select the breakout connector type.
 79 = LC uniboot, low-loss MM
 78 = LC uniboot SM
LCs are universally wired.

- 3** Select fiber type.
 T = 50 μm multimode (OM3)
 Q = 50 μm multimode (OM4)
 V = 50 μm wideband multimode (OM5)
 G = Single-mode Ultra (OS2)

- 4** Defines cable type.
 PH = Plenum, harness

- 5** Select leg length in inches (leg OD is 2.0 mm).
 J = 12 in (+3/-0 in)
 K = 24 in (+3/-0 in)
 L = 36 in (+3/-0 in)
 M = 48 in (+3/-0 in)
 N = 60 in (+3/-0 in)
 P = 72 in (+3/-0 in)
 R = 98 in (+3/-0 in)

Furcation legs are color coded by fiber type.

- 6** Select harness polarity.
 A = Type-A
 B = Type-B

Note: For harness polarity, reference AEN156.

- 7** Select the harness length.

003-200 ft
(1 ft increments measured from plug to MTP, does not include stagger)

001-060 m
(1 m increments measured from plug to MTP, does not include stagger)

- 8** Select unit of measure.

F = Feet
 M = Meters

An EDGE8 harness should have **type-A polarity** and a **non-pinned MTP PRO** connector when connecting to a **trunk**.

An EDGE8 harness should have **type-B polarity** and a **pinned MTP PRO** connector when connecting to a **module**.

EDGE8 Modules

EDGE8™ modules provide the interface between the MTP® connector on the trunk and the LC duplex patch cords that will then connect directly into the electronics or as a cross-connect in the main distribution area (MDA).

All EDGE8 modules can be installed from the front or the rear of any EDGE8 solutions housing using a simple release mechanism eliminating the need for any tools. LC duplex adapters feature hinged shutters that move up and out of the way when the connector is inserted. Specially designed indents in the shutters ensure that the end faces of the connectors are never touched. These shutters replace the standard dust caps that are typically never replaced once removed, thereby exposing the interior end faces to dust particles and possible damage. In addition, the shutters are visual fault locator (VFL) compatible to allow easy port identification while diffusing the VFL light to ensure adequate eye safety.



Optical Performance

	Connector Type	Module Insertion Loss, Max	Fiber Category	Adapter Color Front
Multimode Modules	PC	0.35 dB	50 µm MM (OM4/OM5)	Aqua
Single-Mode Modules	UPC	0.60 dB	SM (OS2)	Blue

EDGE8™ MTP® to LC Duplex Module

EDGE8™ modules provide an interface between 8-fiber MTP® connectors and LC duplex connectors. The internal wiring of the module based on universal polarity ensures the correct fiber polarity throughout the entire system independent of how many modules are implemented within the link. Ultra low-loss connectivity enables design flexibility to permit multiple potential connections within the system (e.g. 6-module link).


Features

- Breaks out 8-fiber MTP terminations from the rear into 4x LC duplex connectivity at the front
- Ultra-low-loss connectivity of 0.35 dB enables system design flexibility
- Internal wiring (universal polarity) ensures correct fiber polarity throughout the system
- Features LC duplex adapters with translucent inward-folding shutters which:
 - provide reliable dust protection without the need for dust caps
 - allow fiber identification with visual fault locator (VFL)
 - diffuse VFL light for eye safety
- Easily swappable with MTP panels to:
 - accommodate changing requirements while leaving trunk cable infrastructure in place
 - migrate to MTP ports for parallel optics
- Packaged in easy-open containers



EDGE8 MTP to LC Duplex Module
| Photo REN2547

Ordering Information

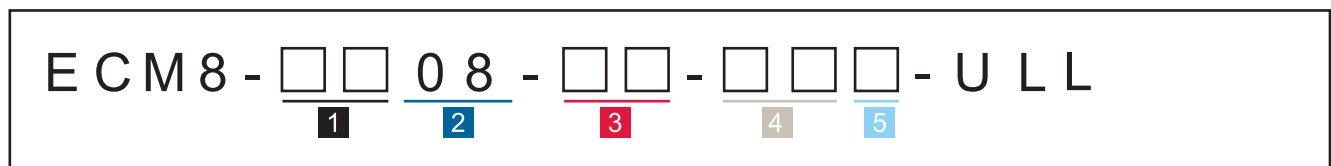

1 Select polarity.
 UM = Universal polarity
 RM = Straight-through

2 Defines fiber count.
 08 = 8 fibers

3 Select adapters on module front.
 05 = Shuttered LC duplex MM
 04 = Shuttered LC UPC duplex SM
 18 = Shuttered LC APC duplex SM

4 Select MTP adapter on the back of the module.
 E6 = MTP 8 F (non-pinned) MM
 E8 = MTP 8 F (non-pinned) SM
Other pinning configurations available upon request

5 Select fiber type.
 Q = 50 μm multimode (OM4)
 V = 50 μm wideband multimode (OM5)
 G = Single-mode Ultra (OS2)

EDGE™ Base-8 MTP® to LC Duplex Module

The 8-fiber MTP® to LC duplex module is a solution that is well suited for customers that want to migrate to an 8-fiber solution, while still utilizing an existing EDGE™ footprint.


Features

- Breaks out 8-fiber MTP terminations from the rear into 4x LC duplex connectivity at the front
- Ultra-low-loss connectivity of 0.35 dB enables system design flexibility
- Easy integration into existing EDGE (Base-12) housings or hardware
- Internal wiring (universal polarity) ensures correct fiber polarity throughout the system
- Features LC duplex adapters with translucent inward-folding shutters which:
 - provide reliable dust protection without the need for dust caps
 - allow fiber identification with visual fault locator (VFL)
 - diffuse VFL light for eye safety
- Easily swappable with MTP panels to:
 - accommodate changing requirements while leaving trunk cable infrastructure in place
 - migrate to MTP ports for parallel optics
- Packaged in easy-open containers



EDGE Base-8 MTP to LC Duplex Module | Photo REN2514

Ordering Information

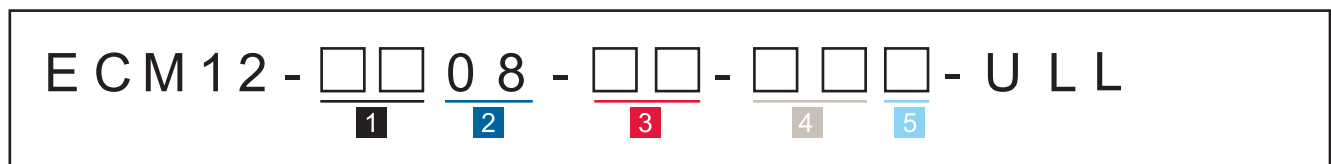

- | | | |
|---|---|--|
| <p>1 Select polarity.</p> <ul style="list-style-type: none"> UM = Universal polarity RM = Straight-through | <p>3 Select adapters on module front.</p> <ul style="list-style-type: none"> 05 = Shuttered LC duplex MM 04 = Shuttered LC duplex SM | <p>5 Select fiber type.</p> <ul style="list-style-type: none"> Q = 50 μm multimode (OM4)* G = Single-mode Ultra (OS2) |
| <p>2 Defines fiber count.</p> <ul style="list-style-type: none"> 08 = 8 fibers | <p>4 Select MTP adapter on the back of the module.</p> <ul style="list-style-type: none"> E6 = MTP 8 F (non-pinned) MM E8 = MTP 8 F (non-pinned) SM <p><i>Other pinning configurations available upon request.</i></p> | |

*Compatible with wideband (OM5) solutions.

EDGE8™ Port Breakout Module

EDGE8™ MTP® port breakout modules enable conversion from a single 4-channel parallel optic port (such as 40GSR4 (QSFP)), to a patch panel representation with four LC duplex ports for use in a main distribution area.

Typically, the MTP tail will connect to the active electronics and breakout the 8-fiber QSFP 40G transceiver into 4x 2-fiber 10G LC duplex connections.


Features

- Breaks out 8-fiber MTP terminations from the rear into 4x LC duplex connectivity at the front
- Ultra-low-loss connectivity of 0.35 dB enables system design flexibility
- Internal wiring (universal polarity) ensures correct fiber polarity throughout the system
- Features LC duplex adapters with translucent inward-folding shutters which:
 - provide reliable dust protection without the need for dust caps
 - allow fiber identification with visual fault locator (VFL)
 - diffuse VFL light for eye safety
- Packaged in easy-open containers



EDGE8 Port Breakout Module
| Photo REN2518

Ordering Information

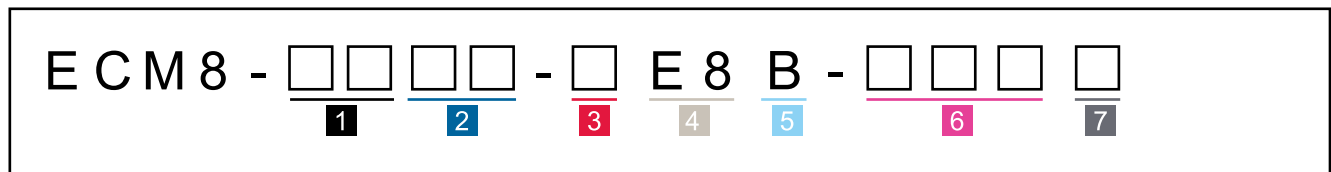

1 Select adapters on module front.
 05 = Shuttered LC duplex MM
 04 = Shuttered LC UPC duplex SM
LCs are universally wired.

2 Select MTP adapter on the back of the module.
 E6 = MTP 8 F (non-pinned) MM
 E8 = MTP 8 F (non-pinned) SM
Other pinning configurations available upon request.

3 Select fiber type.
 Q = 50 μm multimode (OM4)
 V = 50 μm wideband multimode (OM5)
 G = Single-mode Ultra (OS2)

4 Defines cable type.
 E8 = Plenum, interconnect

5 Select polarity.
 B = Type-B

6 Select cable length.
 003-075 ft
(1 ft increments measured from furcation plug to furcation plug)
 001-025 m
(1 m increments measured from furcation plug to furcation plug)

7 Select unit of measure.
 F = Feet
 M = Meters

EDGE8™ Front Access Breakout Module

This module will typically connect to the active electronics, via a jumper or harness, and break out the 8-fiber QSFP 40G transceiver into 4x 2-fiber 10G LC duplex connections.

The module has an EDGE™ footprint for easy integration in a Base-12 solution. Its all-front access to the adapters make it ideal for deployments where space and access are challenging.

Features

- Breaks out 8-fiber MTP® terminations into 4x LC duplex connectivity, all at the front
- Ultra-low-loss connectivity of 0.35 dB enables system design flexibility
- Easy integration into existing EDGE (Base-12) deployments
- Internal wiring (universal polarity) ensures correct fiber polarity throughout the system
- Features LC duplex adapters with translucent inward folding shutters which:
 - provide reliable dust protection without the need for dust caps
 - allow fiber identification with visual fault locator (VFL)
 - diffuse VFL light for eye safety
- Packaged in easy-open containers



Front Access Breakout Module
| Photo REN2574

Part Number	Adapter Type Front	Fiber Count	Fiber Category
ECM-UM08-05-E5QF-U LL	LC duplex/MTP (pinned)	8	50 μm MM (OM3/OM4/OM5)
ECM-UM08-05-E6QF-U LL	LC duplex/MTP (non-pinned)	8	50 μm MM (OM3/OM4/OM5)
ECM-UM08-04-E7GF-U LL	LC duplex/MTP (pinned)	8	Bend-improved SM (OS2)
ECM-UM08-04-E8GF-U LL	LC duplex/MTP (non-pinned)	8	Bend-improved SM (OS2)

Plug & Play™ Base-8 Module

The 24-fiber MTP® to LC duplex module is ideal for customers that want to deploy a Base-8 solution in an existing CCH or PCH infrastructure.

Features

- Breaks out three 8-fiber MTP terminations from the rear into 24x LC duplex connectivity at the front
- Ultra-low-loss connectivity of 0.35 dB enables system design flexibility
- Easy integration into existing Plug & Play (CCH or PCH) deployments
- Internal wiring (universal polarity) ensures correct fiber polarity throughout the system
- Features LC duplex adapters with translucent inward folding shutters which:
 - provide reliable dust protection without the need for dust caps
 - allow fiber identification with visual fault locator (VFL)
 - diffuse VFL light for eye safety



Plug & Play Base-8 Module
|Photo REN1949

Part Number	Adapter Type Back	Fiber Count	Fiber Category
CCH8-UM24-05-E5Q-ULL	MTP (pinned)	24	50 µm MM (OM3/OM4/OM5)
CCH8-UM24-05-E6Q-ULL	MTP (non-pinned)	24	50 µm MM (OM3/OM4/OM5)
CCH8-UM24-04-E7G-ULL	MTP (pinned)	24	Bend-improved SM (OS2)
CCH8-UM24-04-E8G-ULL	MTP (non-pinned)	24	Bend-improved SM (OS2)

EDGE8™ Adapter Panels MTP®

EDGE8™ MTP® adapter panels are pass-through panels that provide a simple interface to mate MTP connectors. This occurs when connecting MTP trunks to MTP extended trunks, MTP trunks to trunk harnesses, and in 40G multimode networks, connecting MTP trunks to 40G patch cords. The backbone trunks connect at the rear of the adapters and then various connection options are possible at the front using end-to-end links such as MTP harnesses, MTP trunks to 40G patch cords (and in 40G multimode networks), etc. The MTP adapter panel is the easiest way to implement parallel optic applications in your data center while retaining the existing hardware.

All EDGE8 adapter panels can be installed from the front or rear of any EDGE8 hardware using a simple release mechanism thereby eliminating the need for any tools. EDGE8 MTP adapter panels are available with one, two, and four 8-fiber adapters for multimode and single-mode applications. All panels feature unique shuttered MTP reversible adapters at the front of the panel for on-site changes to manage field polarity, and visual fault locator (VFL) compatible shutters that enable easy port identification while defusing the VFL light to ensure adequate eye safety.



EDGE8 Adapter Panel
| Photo REN485

Features

- Provide MTP connection points between trunks, harnesses, and patch cords
- Can be installed or removed from the front or rear of a housing
- MTP adapter panels facilitate simple upgrades to parallel optics
- Enable pay-as-you-grow approach
- Packaged in easy-open containers
- Translucent shutters diffuse VFL light and eliminating the need for dust caps

Part Number	Adapter Type Back	Fiber Count	Fiber Category
EDGE8-CP08-V1	MTP®	8	SM (OS2)
EDGE8-CP16-V1	MTP®	16	SM (OS2)
EDGE8-CP24-V1	MTP®	24	SM (OS2)
EDGE8-CP32-V1	MTP®	32	SM (OS2)
EDGE8-CP08-V3	MTP®	8	50 µm MM (OM3/OM4/OM5)
EDGE8-CP16-V3	MTP®	16	50 µm MM (OM3/OM4/OM5)
EDGE8-CP24-V3	MTP®	24	50 µm MM (OM3/OM4/OM5)
EDGE8-CP32-V3	MTP®	32	50 µm MM (OM3/OM4/OM5)




EDGE8™ Tap Modules

EDGE8™ tap modules enable passive optical tapping of the network while reducing downtime and link loss, and increase rack space utilization and density compared to other optical tap options.

Unlike other passive optical tap solutions that must be added as separate devices in the network link, the EDGE8 tap modules integrate the coupler technology for passive optical tapping into a structured cabling component – the module. Monitored ports can be added without disrupting the system's live traffic, and insertion loss in the link is reduced by the integration of the passive optical tapping into the module.

EDGE8 tap modules use an advanced splitter technology for multimode to reduce insertion loss compared to traditional splitter technology.

EDGE8 tap modules enable up to 72 monitor links per one rack unit (1RU), and they fit seamlessly into EDGE8 Solutions hardware for maximum cable management and better utilization of rack space.

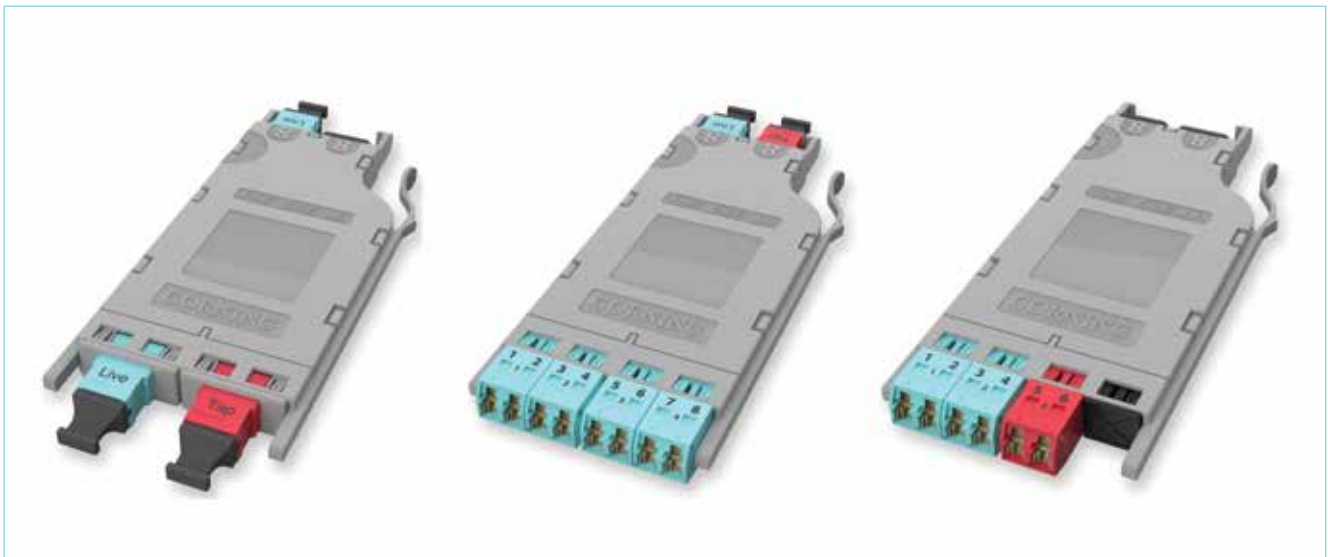

EDGE8 Tap Modules - MTP to MTP; MTP to LC; LC to LC
| Photo REN3234



EDGE8™ LC to LC Tap Modules

EDGE8™ tap modules for traditional LC duplex systems enable customers to manage the monitoring access points via the patch cord infrastructure zone at the front of the cabinets.

EDGE8 LC to LC tap modules have one LC duplex adapter for tap and two duplex adapters for live traffic. The tap adapters are red and the live traffic adapters are blue (for single-mode) or aqua (for multimode). The red LC adapter enables monitoring on the application side.



Multimode

Part Number	Description
ETM8-50A-Q	EDGE8™ TAP Module LC-LC
ETM8-50A-Q-BD	EDGE8™ TAP Module BiDi LC-LC
ETM8-70A-Q-PREM	EDGE8™ TAP Module Premium LC-LC
ETM8-80A-Q-PREM	EDGE8™ TAP Module Premium LC-LC

Single-Mode

Part Number	Description
ETM8-50A-G	EDGE8™ TAP Module LC-LC
ETM8-70A-G	EDGE8™ TAP Module LC-LC
ETM8-80A-G	EDGE8™ TAP Module LC-LC
ETM8-90A-G	EDGE8™ TAP Module LC-LC

Specs

Part Number	Fiber Type	Split Ratio	Splitter Loss (dB) Live/TAP	LC Connector Loss (dB)	MTP® Connector Loss (dB)	Tap Module's Live Link Loss (dB)	Tap Module's TAP Link Loss (dB)
ETM8-50A-Q	OM4	50/50	3.7/3.7	0.10	N/A	4.0	4.0
ETM8-50A-Q-BD	OM4	50/50	3.7/3.7	0.10	N/A	4.0	4.0
ETM8-70A-Q-PREM	OM4	70/30	1.8/5.8	0.10	N/A	2.1	6.1
ETM8-80A-Q-PREM	OM4	80/20	1.3/7.3	0.10	N/A	1.6	7.6
ETM8-50A-G	OS2	50/50	3.5/3.5	0.25	N/A	4.0	4.0
ETM8-70A-G	OS2	70/30	2.0/5.8	0.25	N/A	2.5	6.3
ETM8-80A-G	OS2	80/20	1.3/7.8	0.25	N/A	1.8	8.3
ETM8-90A-G	OS2	90/10	0.7/11.8	0.25	N/A	1.2	12.3

EDGE8™ Solutions



EDGE8™ MTP® to LC Tap Modules

EDGE8™ MTP® to LC tap modules have a “Live” pinless MTP adapter (aqua for multimode; black for single-mode) and a “Tap” pinless MTP adapter (red) on the back of the module. This enables monitoring of the four live LC duplex ports on the application side.



Multimode	
Part Number	Description
ETM8-50B-Q	EDGE8™ TAP Module MTP-LC
ETM8-70B-Q-PREM	EDGE8™ TAP Module Premium MTP-LC
ETM8-80B-Q-PREM	EDGE8™ TAP Module Premium MTP-LC

Single-Mode	
Part Number	Description
ETM8-50B-G	EDGE8™ TAP Module MTP-LC
ETM8-70B-G	EDGE8™ TAP Module MTP-LC
ETM8-80B-G	EDGE8™ TAP Module MTP-LC
ETM8-90B-G	EDGE8™ TAP Module MTP-LC

Specs							
Part Number	Fiber Type	Split Ratio	Splitter Loss (dB) Live/TAP	LC Connector Loss (dB)	MTP Connector Loss (dB)	Tap Module's Live Link Loss (dB)	Tap Module's TAP Link Loss (dB)
ETM8-50B-Q	OM4	50/50	3.7/3.7	0.10	0.25	4.15	4.3
ETM8-70B-Q-PREM	OM4	70/30	1.8/5.8	0.10	0.25	2.2	6.3
ETM8-80B-Q-PREM	OM4	80/20	1.3/7.3	0.10	0.25	1.7	7.8
ETM8-50B-G	OS2	50/50	3.5/3.5	0.25	0.35	4.1	4.2
ETM8-70B-G	OS2	70/30	2.0/5.8	0.25	0.35	2.6	6.5
ETM8-80B-G	OS2	80/20	1.3/7.8	0.25	0.35	1.9	8.5
ETM8-90B-G	OS2	90/10	0.7/11.8	0.25	0.35	1.3	12.5



EDGE8™ MTP® to MTP Tap Modules

EDGE8™ MTP® to MTP tap modules provide an MTP interface at the front of the tap module which can be used with a harness for LC breakout applications, or with MTP patch cords for parallel optic applications. The MTP monitoring port can be located at the front or rear of the tap module.

The front-of-module configuration has pinless "Tap" (red) and pinned "Live" (aqua for multimode, black for single-mode) MTP adapters on the front of the tap module and a pinless "Live" (aqua for multimode, black for single-mode) MTP adapter on the rear of the tap module. This configuration enables simple patch management of the monitoring links via the patching zone at the front of the rack.

The back-of-module configuration has a pinned "Live" MTP adapter (aqua for multimode; black for single-mode) on the front of the module and pinless "Live" (aqua for multimode; black for single-mode) and "Tap" (red) MTP adapters on the rear of the module. This allows for remote monitoring away from the main data center infrastructure.



Multimode	
Part Number	Description
ETM8-50C-Q	EDGE8™ TAP Module MTP-MTP
ETM8-50C-Q-R	EDGE8™ TAP Module MTP-MTP and Rear Tap
ETM8-70C-Q-PREM	EDGE8™ TAP Module Premium MTP-MTP
ETM8-70C-Q-R-PREM	EDGE8™ TAP Module Premium MTP-MTP and Rear Tap
ETM8-80C-Q-PREM	EDGE8™ TAP Module Premium MTP-MTP
ETM8-80C-Q-R-PREM	EDGE8™ TAP Module Premium MTP-MTP and Rear Tap

Single-Mode	
Part Number	Description
ETM8-50C-G	EDGE8™ TAP Module MTP-MTP
ETM8-50C-G-R	EDGE8™ TAP Module MTP-MTP and Rear Tap
ETM8-70C-G	EDGE8™ TAP Module MTP-MTP
ETM8-70C-G-R	EDGE8™ TAP Module MTP-MTP and Rear Tap
ETM8-80C-G	EDGE8™ TAP Module MTP-MTP
ETM8-80C-G-R	EDGE8™ TAP Module MTP-MTP and Rear Tap
ETM8-90C-G	EDGE8™ TAP Module MTP-MTP
ETM8-90C-G-R	EDGE8™ TAP Module MTP-MTP and Rear Tap



EDGE8™ MTP® to MTP Tap Modules

Specs							
Part Number	Fiber Type	Split Ratio	Splitter Loss (dB) Live/TAP	LC Connector Loss (dB)	MTP® Connector Loss (dB)	Tap Module's Live Link Loss (dB)	Tap Module's TAP Link Loss (dB)
ETM8-50C-Q	OM4	50/50	3.7/3.7	N/A	0.25	4.3	4.3
ETM8-50C-Q-R	OM4	50/50	3.7/3.7	N/A	0.25	4.3	4.3
ETM8-70C-Q-PREM	OM4	70/30	1.8/5.8	N/A	0.25	2.4	6.4
ETM8-70C-Q-R-PREM	OM4	70/30	1.8/5.8	N/A	0.25	2.4	6.4
ETM8-80C-Q-PREM	OM4	80/20	1.3/7.3	N/A	0.25	1.9	7.9
ETM8-80C-Q-R-PREM	OM4	80/20	1.3/7.3	N/A	0.25	1.9	7.9
ETM8-50C-G	OS2	50/50	3.5/3.5	N/A	0.35	4.2	4.2
ETM8-50C-G-R	OS2	50/50	3.5/3.5	N/A	0.35	4.2	4.2
ETM8-70C-G	OS2	70/30	2.0/5.8	N/A	0.35	2.7	6.5
ETM8-70C-G-R	OS2	70/30	2.0/5.8	N/A	0.35	2.7	6.5
ETM8-80C-G	OS2	80/20	1.3/7.8	N/A	0.35	2.0	8.5
ETM8-80C-G-R	OS2	80/20	1.3/7.8	N/A	0.35	2.0	8.5
ETM8-90C-G	OS2	90/10	0.7/11.8	N/A	0.35	1.4	12.5
ETM8-90C-G-R	OS2	90/10	0.7/11.8	N/A	0.35	1.4	12.5



EDGE8™ MTP® to MTP Tap Harnesses

EDGE8™ MTP® to MTP tap harness is used to break out the 8-fiber tap port at the rear of the EDGE8 tap module into two 4-fiber MTP connectors that plug into monitoring electronics.



EDGE8 MTP to MTP Tap Harness
| Photo REN3262

Ordering Information



1 Select connector (To TAP Module or Panel)
 E5 = MTP 8 F (pinned) MM
 E6 = MTP 8 F (non-pinned) MM
 E7 = MTP 8 F (pinned) SM
 E8 = MTP 8 F (non-pinned) SM

2 Select MTP connector (to electronics - each MTP connector has 4 fibers).
 E6 = MTP 8 F (non-pinned) MM
 E8 = MTP 8 F (non-pinned) SM

3 Select fiber type.
 Q = 50 μm multimode (OM4)
 V = 50 μm wideband multimode (OM5)
 G = Single-mode Ultra (OS2)

4 Defines cable type.
 PH= Plenum, harness

5 Select leg length in inches (leg OD is 2.0 mm).
 J = 12 in (+3/-0 in)
 K = 24 in (+3/-0 in)

6 Defines harness polarity.
 B = Type-B

7 Select harness length.
 003-200 ft
(1 ft increments measured from plug to MTP, does not include stagger)
 001-060 m
(1 m increments measured from plug to MTP, does not include stagger)

8 Select unit of measure.
 F = Feet
 M = Meters

EDGE8™ MTP® to LC Tap Harness

EDGE8™ MTP® to LC port tap harness is used to break out the 8-fiber tap port at the rear of the EDGE8 port tap module into LC simplex connectors that plug into monitoring electronics.

MTP PRO allows for pinning and polarity changes in the field.



Ordering Information

H	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	0 8	<input type="text"/>	P H	-	<input type="text"/>	B	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	1	2				3	4		5	6		7	8	

- 1** Select MTP connector (from TAP module).
 E5 = MTP 8 F (pinned) MM
 E6 = MTP 8 F (non-pinned) MM
 E7 = MTP 8 F (pinned) SM
 E8 = MTP 8 F (non-pinned) SM

- 2** Select breakout connector type.
 02 = LC simplex SM
 03 = LC simplex, low-loss MM

- 3** Select fiber type.
 Q = 50 μm multimode (OM4)
 V = 50 μm wideband multimode (OM5)
 G = Single-mode Ultra (OS2)

- 4** Defines cable type.
 PH = Plenum, harness

- 5** Select leg length in inches (leg OD is 2.0 mm).
 J = 12 in (+3/-0 in)
 K = 24 in (+3/-0 in)

- 6** Defines harness polarity.
 B = Type-B

- 7** Select harness length.
 003-200 ft
(1 ft increments measured from furcation to MTP, does not include leg length)
 001-060 m
(1 m increments measured from furcation to MTP, does not include leg length)


- 8** Select unit of measure.
 F = Feet
 M = Meters

Reverse Polarity Uniboot Duplex Jumpers

EDGE™ reverse polarity uniboot duplex jumpers allow for the quick and easy conversion from a TIA-568 A-B polarity to a TIA-568 A-A polarity without exposing the fibers or needing any tools. This jumper comes with a straight-through polarity from the factory, but you can convert it to a flipped jumper with no tools. This uniboot design allows one cable to carry both fibers, reducing jumper bulk when routing.

Features

- Slim, round 2-fiber interconnect cable
- Uniboot-style duplex connectors
- Improved handling in high-density applications
- Low-loss connectivity enables system design flexibility
- Enabled by bend-insensitive Corning® ClearCurve® multimode or SMF-28e® Ultra single-mode fibers
- Designed to withstand tight bends and challenging cable routes

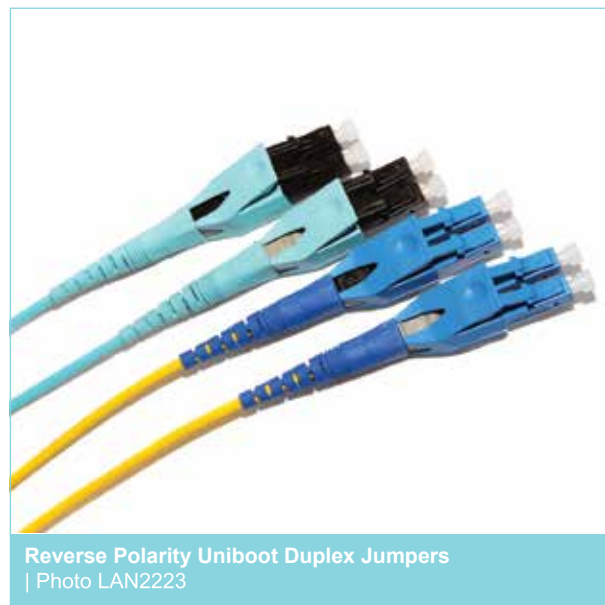


Reverse Polarity Uniboot Duplex Jumpers
| Photo LAN2223

LC Uniboot Patch Cord Specifications

Connector	Connector Code	Typical Connector Attenuation (dB)	Return Loss (dB)
MM LC uniboot	79	0.10	≤ 26
SM LC UPC uniboot	78	0.25	≤ 55
SM LC APC uniboot	80	0.25	≤ 65

Ordering Information

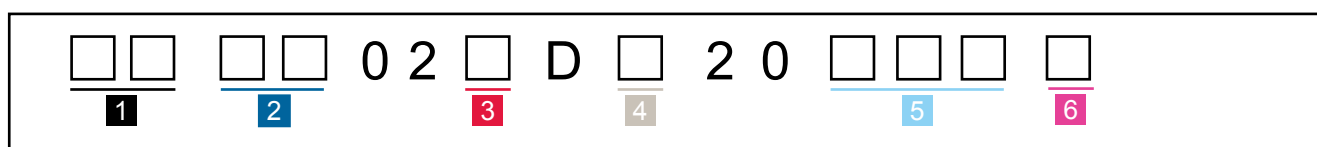

1 Select connector one type.
 79 = Multimode LC uniboot (OM3/OM4/OM5)
 78 = Single-mode LC UPC uniboot (OS2)
 80 = Single-mode LC APC uniboot (OS2)

2 Select connector two type.
 79 = Multimode LC uniboot (OM3/OM4/OM5)
 78 = Single-mode LC UPC uniboot (OS2)
 80 = Single-mode LC APC uniboot (OS2)

3 Select fiber type.
 T = 50 μm multimode (OM3)
 Q = 50 μm multimode (OM4)
 V = 50 μm wideband multimode (OM5)
 G = Single-mode Ultra (OS2)

4 Select flame rating.
 1 = Riser
 8 = Plenum

5 Select length.
 001-250 (tip-to-tip)

6 Select unit of measure.
 F = Feet
 M = Meters

Reverse Polarity LC Duplex Clips

All reverse polarity uniboot LC duplex connectors come with a clip that is removable. We offer a total of 12 colors to allow for easy link identification or fabric segmentation.



Ordering Information



TRIGGER-BP-U- **1**

- 1** Select color.
- N = Blue
- E = Orange
- G = Green
- W = White
- C = Slate
- R = Red
- B = Black
- Y = Yellow
- V = Violet
- P = Rose
- A = Aqua
- K = Beige





Note: Must order in multiples of 100.



Cleaning Accessories



Part Number	Product Description	Units per Delivery	
CLEANER-PORT-LC	Single-Fiber Port Cleaner for LC, keyed LC, and MU connector end faces for both UPC and APC polishes	1/1	
2104466-01	Fiber Optic Cleaning Tool used to clean MTP® connector end faces as well as MTP connectors installed in a module	1/1	

Housing Accessories






Part Number	Product Description	Units per Delivery	
EDGE8-TRAY-QTY1	EDGE8™ Hardware Accessory, EDGE8 tray kit, quantity of 1	1/1	
EDGE8-TRAY-QTY12	EDGE8™ Hardware Accessory, EDGE8 tray kit, quantity of 12	12/1	
EDGE8-01U-TRAY	EDGE8™ Hardware Accessory, EDGE8-01U tray kit, 12 pack, POS 01 to 02	1/1	
EDGE8-02U-TRAY	EDGE8™ Hardware Accessory, EDGE8-02U tray kit, 12 pack, POS 01 to 06	1/1	
EDGE8-04U-TRAY	EDGE8™ Hardware Accessory, EDGE8-04U tray kit, 12 pack, POS 01 to 12	1/1	
EDGE-BKT-WT-2RU	Wire Tray Mounting Bracket for up to 2U of housing mounting space	1/1	
EDGE-BKT-WT-4RU	Wire Tray Mounting Bracket for up to 4U of housing mounting space	1/1	



Housing Accessories








Part Number	Product Description	Units per Delivery	
EDGE-BKT-LR-2RU	Ladder Rack Mounting Bracket for up to 2U of housing mounting space	1/1	
EDGE-BKT-LR-4RU	Ladder Rack Mounting Bracket for up to 4U of housing mounting space	1/1	

Trunk Accessories

Part Number	Product Description	Units per Delivery	
EDGE-CDF-RJ04-BKT	EDGE™ Solutions Strain-Relief Bracket, accommodating four EDGE solutions clip parking positions	1/1	
EDGE-CDF-RJ08-BKT	EDGE™ Solutions Strain-Relief Bracket, accommodating eight EDGE solutions clip parking positions	1/1	
EDGE-CDF-RJ12-BKT	EDGE™ Solutions Strain-Relief Bracket, accommodating 12 EDGE solutions clip parking positions	1/1	
PC1-BKT-23	EDGE™ Extension and Flush-Mount Bracket for mounting 1U housings into 23-in racks or cabinets	1/1	
PC2-BKT-23	EDGE™ Extension and Flush-Mount Bracket for mounting 2U housings into 23-in racks or cabinets	1/1	








Trunk Accessories

Part Number	Product Description	Units per Delivery	
PC4-BKT-23	EDGE™ Solutions Mounting Bracket for mounting 4U housings into 23-in racks or cabinets	1/1	
EDGE-01U-FLSH-BKT	EDGE™ Extension and Flush-Mount Bracket for EDGE-01U	1/1	
CJP-01U-P	Pretium™ Jumper Management Panel 1U; provides jumper management in a 1.75-in rack space	1/1	
CJP-02U-P	Pretium™ Jumper Management Panel 2U; provides jumper management in a 3.5-in rack space	1/1	
EDGE8-CCHBKT-1	Bracket to hold one EDGE8™ solutions module that fits into Plug & Play™ housings	1/1	
EDGE8-CCHBKT-2	Bracket to hold two EDGE8™ solutions module that fits into Plug & Play housings	1/1	
EDGE-EMOD-STRN	EDGE™ Solutions Strain-Relief Bracket, EMOD, 1U	1/1	



MTP® PRO Accessories

Part Number	Product Description	Units per Delivery	
MTPPRO-TOOL	Field Tool to perform pinning and polarity changes of MTP® PRO connectors	1/1	
MTPPRO-PEX-MME-NOPINS	MTP PRO Pin Exchanger Kit, SM MTP Elite, Empty (without pins)	1/1	
MTPPRO-PEX-MME-PINS	MTP PRO Pin Exchanger Kit, MM MTP Elite, Loaded (with pins)	1/1	
MTPPRO-PEX-SME-NOPINS	MTP PRO Pin Exchanger Kit, SM MTP Elite, Empty (without pins)	1/1	
MTPPRO-PEX-SME-PINS	MTP PRO Pin Exchanger Kit, SM MTP Elite, Loaded (with pins)	1/1	



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2018 Corning Optical Communications. All rights reserved. LAN-2266-AEN